


# Technical Data - AS945

## **Product description**

- 50mm wide antislip tape
- Black in colour with 10mm photoluminscent stripe

#### Construction

- #36 grit aluminium oxide layer with 10mm wide photoluminoscent stripe
- PVC carrier (100μm)
- Solvent acrylic adhesive
- 100gsm paper liner

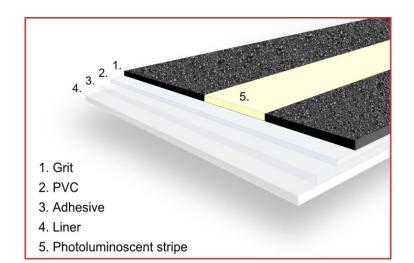

#### **Technical data**

Item	Unit		Spec.		Test method
Total thickness	mm	in	1.2 ± 0.2	.0472 ± .0079	-
Carrier thickness	Mm	In	0.1	0.0039	-
Adhesion	g/25mm	lb/in	1500	3.307	-
Tensile strength	g/625mm²	Lb/in²	6000	13.228	-
Elongation at break	%	-	25	-	-
Water resistance	-	-	GOOD	-	-
UV resistance	-	-	GOOD	-	-
Temperature range	°C	°F	-30 ~ 60	-22 ~ 140	-

### Note

Unless stated otherwise all values given are average. All of the tapes in our range should be thoroughly tested on the substrates in the particular application they are intended for. We will not be responsible for product failure unless full testing has been completed. The customer has to decide on the tapes suitability for the intended application.



